



DATE

**DIRECT** 



PROJECT COMMENTS



## **PRODUCT FEATURES**

## **COMPACT FIXTURE HOUSING**

Width: 2.0" Height: 3.5"

## **ONE-PIECE EXTRUDED ALUMINUM HOUSING**

Housing ensures straighter rows and consistent lens retention

## 120/277VAC 0-10 VOLT DIMMING TO 1% STANDARD

**UP TO 107.2 LUMENS PER WATT** 











# **ORDERING GUIDE** EX: 2S - 20 - HD - 30 - UNV - T1 - WH - EM


SERIES	LENGTH		OUTPUT		CCT	V	OLTAGE	ı	MOUNTING	F	NISH	
25												ORDERING NOTES  1. EM NOT AVAILABLE WITH 347V.
	XX FT	VHD	1250 LM/FT	30	3000K	UNV	120-277V	T1	1" T Grid	WH	White	2. EM NOT AVAILABLE WITH 2' FIXTURES.
	2' Increments EX: 20' = 20	HD	1000 LM/FT	35	3500K	3471	347V	Т9	9/16" T Grid	BLK	Black	3. FOR INDIVIDUAL FIXTURES, SENSOR LOCATED AT POWER FEED END. FOR
		MD	750 LM/FT	40	4000K			sc	Screw Slot			RUNS, A SENSOR IS INSTALLED INTO EACH FIXTURE IN RUN, EX. 2 SENSORS
		LD	500 LM/FT					нс	Hard Ceiling			ARE INSTALLED IN A 16 FT RUN (1 SENSOR IN EACH 8 FT FIXTURE)
		VLD	250 LM/FT					JB	Junction Box			
		CD	Custom									

# **OPTIONS**

CRI	SUSPENSION		INTEGRATED CONTROLS <sup>3</sup>			FOR INDIVIDUALS	FOR LINEAR RUNS <sup>4, 5</sup>			JNS <sup>4, 5</sup>
							E	М		
BLANK = 80 CRI	BLANK	( = 48" CABLE	OS	Occupancy Sensor	EM	<sup>2</sup> Emergency Battery		GENCY RY PACK	QUANTITY PER RUN <sup>4</sup>	POSITION IN RUN <sup>5</sup>
<b>C90</b> 90 CRI	CB96	96" Cables	DOS	Daylight Occupancy Sensor	EC	Emergency Circuit	E	С		
	CB144	144" Cables						GENCY	QUANTITY PER RUN <sup>4</sup>	POSITION IN RUN <sup>5</sup>
	ВС	Black Canopy & Cord								

## **EMERGENCY OPTION NOTES**

- 4. EM AND EC QUANTITY IS NOT TO EXCEED NUMBER OF DISCRETE FIXTURE SECTIONS IN A ROW
- 5. EM AND EC POSITION REFERS TO WHICH FIXTURE IN THE RUN THAT WILL BE POWERED BY THE EM/EC CIRCUIT. POSITION OPTIONS: **S**=STARTER, **J**=JOINER, **E**=ENDER EX: 2S-20-HD-35-UNV-T1-WH-EM2SJ





# **2S** SUSPENDED

#### DIRECT



## **PHOTOMETRICS**


#### 2S-04-HD-35-UNV-XX-X

Total Lumens: 4,148 Ratio: 0% Up & 100% Down

Wattage: 38.8 Efficacy: 106.9 LM/W Fixture Length: Four Feet

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Fixt									
0 - 30	1245.1	30.0									
0 - 40	1982.2	47.8									
0 - 60	3339.1	80.5									
0 - 90	4147.4	100.0									
90 - 180	0.8	0.0									
0 - 180	4148.1	100.0									



## **ENERGY CONSUMPTION** WATTS PER LINEAR FOOT

## **DIRECT (LAMBERTIAN) LIGHT**

	VHD:1250	HD:1000	MD:750	LD:500	VLD:250
W/FT	11.6	9.7	7.2	4.8	2.4
LM/FT	1194	1037	762	515	253
LM/W	102.6	106.9	105.5	107.2	104.3

## **OPERATION**

#### **Light Engine:**

The 2S is available in 3000K, 3500K and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 80+. Optional 90+ CRI available.

The back lit extruded acrylic lens ensures high efficiency light output, in a minimal form factor for a clean, evenly illuminated surface with minimal glare.

#### **Electrical:**

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input. Power factor >0.9. THD <15%. Integral Surge Protection to 2KV.

#### Dimming:

The 2S comes standard with 0-10V dimming down to 1%.

## **Emergency Battery Pack:**

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, 10' HD and VHD, and 12' MD, HD, and VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

## **Emergency Circuit:**

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run with needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

## **GENERAL**

## Warranty:

Ten (10) Year limited warranty from date of shipment.

#### Lumen Maintenance:

Rated for 85% initial lumen output at 85,000 Hours of operation, operated at 25°C ambient temperature; per TM-21 Guidelines published by the Illuminating Engineering Society (IES).

## Certifications:

All Luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

## Shipping:

2-Week lead time for orders up to 1000 Linear Feet.

4-Week lead time for orders with a Black finish.

Lead time for orders greater than 1,000' will be determined at time of order.

#### Manufactured in the USA:

All ALL Luminaires and Components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.

## **MECHANICAL**

## **Housing Construction:**

Extruded Aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment and mounting attachment. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire.

#### Alignment/Assembly:

The alignment system employs a four-point alignment and attachment method, designed to create straighter rows and minimize seams between sections (field assembled). Four alignment pins ensure the outer extruded aluminum rails are aligned, while a draw-screw secures housing-to-housing attachment. Additional alignment biscuits double as the light shields.

#### Lengths:

The 2S is available in a minimum 2-foot (nominal) length with additional 2-foot increments available. Longer fixture rows are available and will be configured per ALL factory specifications; typical rows are configured with 4-foot, 6-foot and 8-foot fixtures. Max run length on one power feed is 72'. Continuous runs over 72' will require 2 power feeds.

## Mounting Method/Hardware:

The 2S is available for mounting upon any ceiling type, additional mounting hardware available by others.

## Exterior Finish:

The 2S is available in White and Black polyester powder coat finish to ensure durability.

## **Suspension Components:**

Fixtures are suspended by 1/16" galvanized aircraft cable. Cables are attached to the ceiling suspension point with a ¼-20 threaded ceiling cable barrel that incorporates a threaded ring to support the feed/hanger canopy allowing access to the J-box/hanger without removal of the suspension cable allowing conductor inspection/service without having to support the fixture(s). Feed canopies are 5" O.D. And hanger canopies are 2" O.D. Cable lengths can be specified for 48", 96" and 144" suspension lengths. Ceiling type options are "T1" T-grid, "T9" T-grid, "SC" screw slot grid, "HC" hard ceiling or "JB" hard ceiling J-box mount.

## **Integrated Controls:**


The 2S is available with optional integrated controls. Sensors are conveniently designed to mount in aperture. For individual fixtures, the sensor is located at the power feed end. For runs, each Starter, Joiner and Ender fixture will be supplied with a discrete sensor that will control that specific fixture within the run.








# **MOUNTING DETAILS**

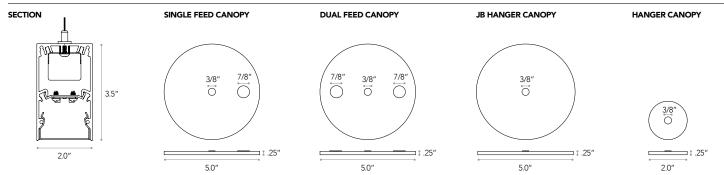


# **FIXTURE ROW LAYOUT: SINGLE UNIT** 2' - 4' - 6' - 8' - 10' - 12'

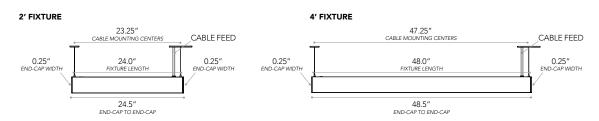


## 6' FIXTURE



## 8' FIXTURE



## 10' FIXTURE



## 12' FIXTURE












## FIXTURE ROW LAYOUT: TWO UNITS 14' - 16'

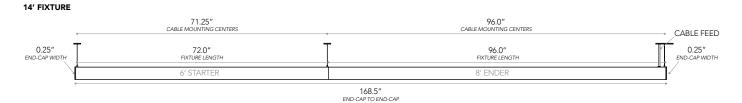

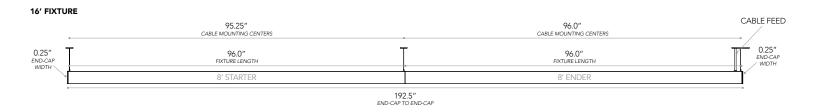

## **FIXTURE ROW LAYOUT: THREE UNITS** 18' - 20' - 22' - 24'

#### 18' FIXTURE



## 20' FIXTURE













# **FIXTURE ROW COMPONENTS**

			FI	XTUR	E LEI	NGTH	S			JOINER KITS		HANGER KITS	END-CAP TO END-CAP
RUN LENGTH (FT)	STARTER			J	OINE	R			ENDER		FEED KITS		
	1	2	3	4	5	6	7	8	9				
14	6'	-	-	-	-	-	-	-	8'	1	1	2	168.5"
16	8'	-	-	-	-	-	-	-	8'	1	1	2	192.5"
18	4'	6'	-	-	-	-	-	-	8'	2	1	3	216.5"
20	4'	8'	-	-	-	-	-	-	8'	2	1	3	240.5"
22	6'	8'	-	-	-	-	-	-	8′	2	1	3	264.5"
24	8′	8'	-	-	-	-	-	-	8'	2	1	3	288.5"
26	4'	6'	8'	-	-	-	-	-	8'	3	1	4	312.5"
28	4'	8'	8'	-	-	-	-	-	8'	3	1	4	336.5"
30	6'	8'	8'	-	-	-	-	-	8'	3	1	4	360.5"
32	8'	8'	8'	-	-	-	-	-	8'	3	1	4	384.5"
34	4'	6'	8'	8'	-	-	-	-	8'	4	1	5	408.5"
36	4'	8'	8'	8'	-	-	-	-	8'	4	1	5	432.5"
38	6'	8'	8'	8'	-	-	-	-	8'	4	1	5	456.5"
40	8'	8'	8'	8'	-	-	-	-	8'	4	1	5	480.5"
42	4'	6'	8'	8'	8'	-	-	-	8'	5	1	6	504.5"
44	4'	8'	8'	8'	8'	-	-	-	8'	5	1	6	528.5"
46	6'	8'	8'	8'	8'	-	-	-	8'	5	1	6	552.5"
48	8'	8'	8'	8'	8'	-	-	-	8'	5	1	6	576.5"
50	4'	6'	8'	8'	8'	8'	-	-	8'	6	1	7	600.5"
52	4'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	624.5"
54	6'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	648.5"
56	8'	8'	8'	8'	8'	8'	-	-	8'	6	1	7	672.5"
58	4'	6'	8'	8'	8'	8'	8'	-	8'	7	1	8	696.5"
60	4'	8'	8'	8'	8'	8'	8'	-	8'	7	1	8	720.5"
62	6'	8'	8'	8'	8'	8'	8'	-	8'	7	1	8	744.5"
64	8'	8′	8'	8'	8'	8'	8'	-	8'	7	1	8	768.5"
66	4'	6'	8'	8'	8'	8'	8'	8'	8'	8	1	9	792.5"
68	4'	8'	8'	8'	8'	8'	8'	8'	8'	8	1	9	816.5"
70	6'	8'	8'	8'	8'	8'	8'	8'	8'	8	1	9	840.5"
72	8'	8'	8'	8'	8'	8'	8'	8'	8'	8	1	9	864.5"

	FIXTURE LENGTH	MOUNTING CENTERS						
	STARTER	STARTER	JOINER / ENDER					
4′	48.0"	47.25"	-					
6′	72.0"	71.25"	72.0"					
8′	96.0"	95.25"	96.0"					

